

LSAR-9501M

Особенности и применение




Спецификация модели

LSAR-9501M


Технические характеристики

10 (4)A/250V AC, 6 (2)A 380V AC	: 10..55	1,5
5mm-0.5m/s	: 1000 / ²	
120 / ;	: 300 / ²	
30 /	Operating life	100,000 ;
≤25mΩ		1 000,000
≥100MΩ (500V DC)	IP65	
1000 V AC;	-10°C...70°C	
1500 V AC	≤85%	

Контактная форма

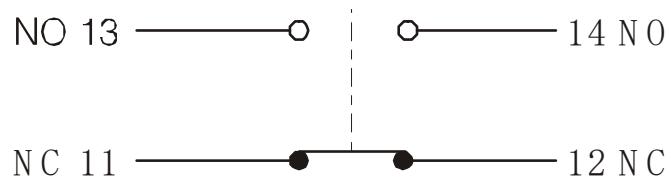

Размеры

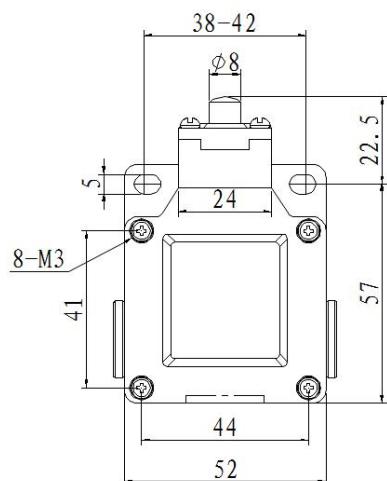

OF max.	700gf(6.86N)
RF min.	180gf(1.76N)
PT max.	2.5mm
OT min.	3mm
MD max.	1.2mm
TT	5.8mm

Структура продукта

